


Overview


Screw Terminal Inserts

- Integral screw terminal contacts provide for easy terminal wiring and fast assembly
- Standard wire protection saddles prevent cutting of strands during assembly

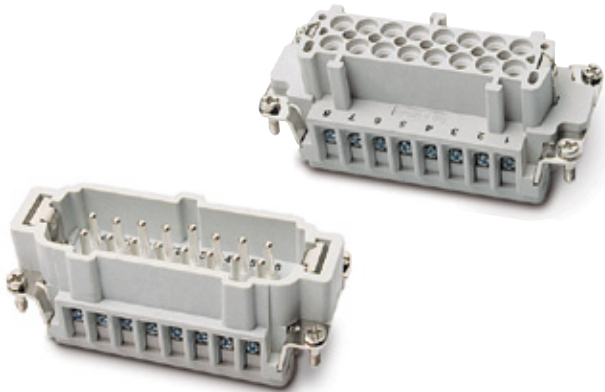

Crimp Terminal Inserts

- Provides reliable connections for long-term configurations
- Contact sizes accommodate wiring from 12–20 AWG

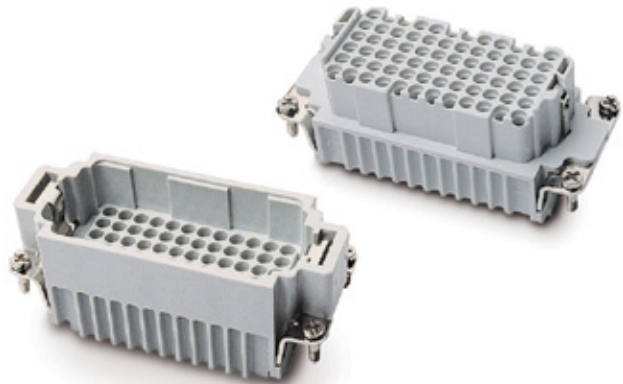

- Made of durable glass fiber-filled thermoplastic
- Contact numbers clearly marked for easy identification
- Easily installed (male or female) in either hoods or bases using captive mounting screws

WAR, Right Ground Strap WAL, Left Ground Strap


Terminal Block Wiring Adapters

- Allows for measuring of circuit while in operation
- Provide easy connections in panel mounting configurations
- Labels available for easy identification of circuits
- Can be mounted on DIN rails by using snap-on mounting feet
- Used in switch cabinets, panel enclosures or mounted in panel base housings — see B and D series

Insert Strip Blank – WAM1B

Insert Strip Nos. 1–64 – WAM1N64

Insert Strip Letters A–Z – WAM1AZ



WAM1 Marker Tab Clips

Snap-in formed label holder tabs allow terminal identification for B Series.



DIN Mounting Foot FE807TB

B Series 16 Amps 600VAC

6, 10 & 16 Contacts + Ground

Accessories

Wiring Adapter Insert for use with Panel Bases; allows single access direction panel-build wiring and easy terminal ID for service and testing.

CAT. NO.	DESCRIPTION
WAM-1	Label Insert Clip
WAM1B	Strip Blank
WAM1N64	Strip Nos. 1-64
WAM1AZ	Strip Letters A-Z



Use small blade screwdriver to push wire entry tab in for easy contact removal.



Crimp Tool

CAT. NO.

WT611TB

Install to Matching Series Hood/Base

6	10	16

Screw Terminal Inserts


SCREW TERMINAL INSERTS	6 + G	10 + G	16 + G
 MALE – PINS 20-14 AWG (.5-2.5 mm ²)	MS206B	MS210B	MS216B
 FEMALE – SLEEVES 20-14 AWG (.5-2.5 mm ²)	FS106B	FS110B	FS116B

Screw Terminal Wiring Adapter Blocks

SCREW TERMINAL WIRING ADAPTER BLOCKS	6 + G	10 + G	16 + G
 FEMALE INSERT, GROUND L. 20-14 AWG (.5-2.5 mm ²)	FS106WAL	FS110WAL	FS116WAL

Technical Information

Mounting Dimensions for Screw and Crimp Terminal Inserts

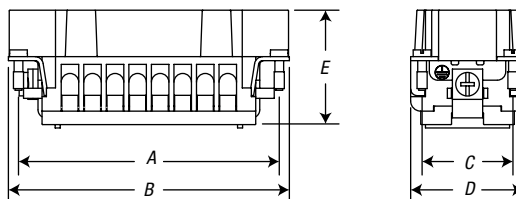

HOUSING SERIES				DIMENSIONS ARE IN INCHES/(MILLIMETERS)					
A, B, T, K	C, V	D	DD	MATING	A	B	C	D	E
A3, A4				BOTH	—	.83/(21)	—	.83/(21)	.98/(25)
		D7, D8		FEMALE	—	.83/(21)	—	.83/(21)	1.25/(31.8)
				MALE	—	.83/(21)	—	.83/(21)	1.19/(30.2)
A10		D15		FEMALE	1.95/(49.5)	2.22/(56.5)	.63/(16)	1.34/(34)	1.14/(29)
				MALE	1.95/(49.5)	2.22/(56.5)	.63/(16)	1.34/(34)	1.26/(32)
A16		D25		FEMALE	2.60/(66)	2.87/(73)	.63/(16)	1.34/(34)	1.14/(29)
				MALE	2.60/(66)	2.87/(73)	.63/(16)	1.34/(34)	1.26/(32)
A32		D50		FEMALE	2.60/(66)	2.87/(73)	.63/(16) x 2	1.34/(34)	1.14/(29)
				MALE	2.60/(66)	2.87/(73)	.63/(16) x 2	1.34/(34)	1.26/(32)
B6, T6			DD24	FEMALE	1.73/(44)	2.01/(51)	1.063/(27)	1.34/(34)	1.46/(37)
				MALE	1.73/(44)	2.01/(51)	1.063/(27)	1.34/(34)	1.38/(35)
B10, T10	V3		DD42	FEMALE	2.24/(57)	2.52/(64)	1.063/(27)	1.34/(34)	1.46/(37)
				MALE	2.24/(57)	2.52/(64)	1.063/(27)	1.34/(34)	1.38/(35)
B16, T16	C6, V6	D40	DD72	FEMALE	3.05/(77.5)	3.33/(84.5)	1.063/(27)	1.34/(34)	1.48/(37.5)
				MALE	3.05/(77.5)	3.33/(84.5)	1.063/(27)	1.34/(34)	1.40/(35.5)
B24, T24, K12	V10, V16	D64	DD108	FEMALE	4.09/(104)	4.37/(111)	1.063/(27)	1.34/(34)	1.48/(37.5)
				MALE	4.09/(104)	4.37/(111)	1.063/(27)	1.34/(34)	1.40/(35.5)
B32	C12	D80	DD144	FEMALE	3.05/(77.5)	3.33/(84.5)	1.063/(27) x 2	1.34/(34)	1.48/(37.5)
				MALE	3.05/(77.5)	3.33/(84.5)	1.063/(27) x 2	1.34/(34)	1.40/(35.5)
B48, K24	V20, V26, V32	D128	DD216	FEMALE	4.09/(104)	4.37/(111)	1.063/(27) x 2	1.34/(34)	1.48/(37.5)
				MALE	4.09/(104)	4.37/(111)	1.063/(27) x 2	1.34/(34)	1.40/(35.5)