

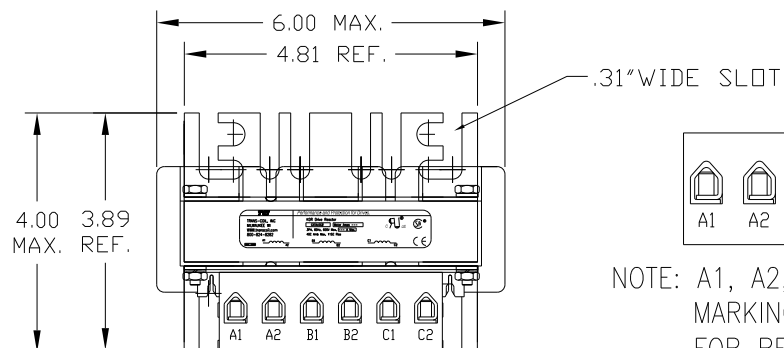
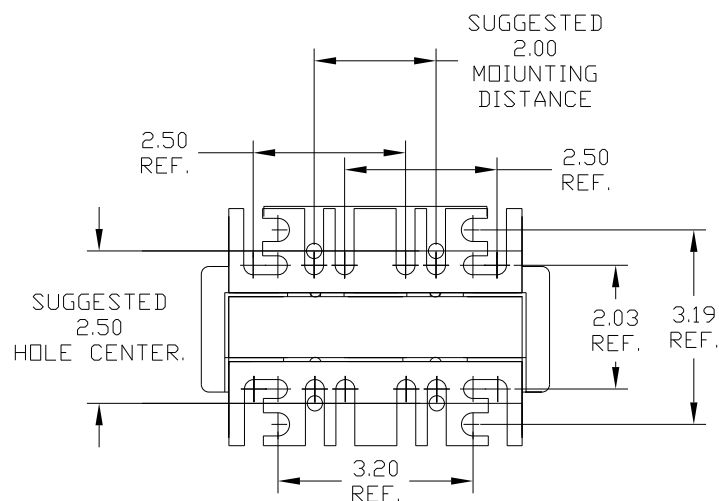





NOTE: A1, A2, B1, B2, C1, C2,
MARKINGS ON TERMINAL BLOCK
FOR REFERENCE ONLY.

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRB1L	480	20	27	79	8	20

Block Wire Range: #18 to #4 AWG Solid or Stranded, Copper
Tightening Torque: 20 LB-IN

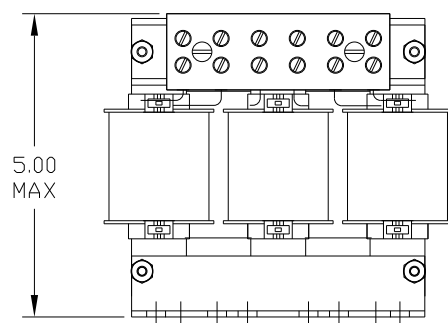

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224 KDR DRIVE REACTOR 480V LOW Z, FRAME B	DRN: BY DSW DATE 07/30/03 SCALE APRVD. B	
				DECIMAL			
				.XX ± .03 .XXX ± .01			
				FRACTIONAL ± 1/32 ANGULAR ± 1/2°			
B	ADD MARKING NOTE	11/16/06	DSW				
△	2235 MOUNTING CHANGE	09/15/03	DSW				
NO	REVISION	DATE	BY				

SHT. 1 of 1