
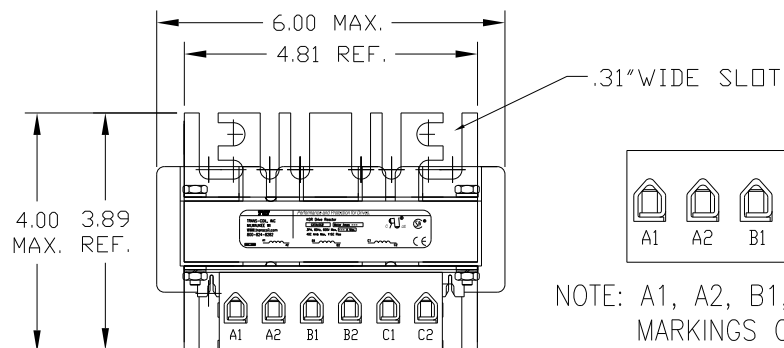





NOTE: A1, A2, B1, B2, C1, C2,
MARKINGS ON TERMINAL BLOCK
FOR REFERENCE ONLY.

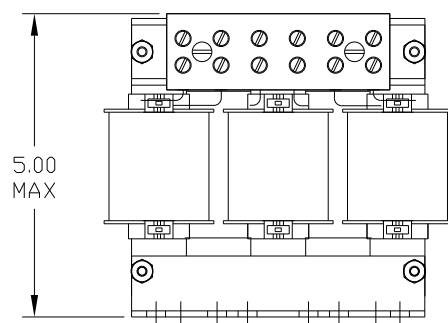

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRB1P	480	10	14	SEE NOTE 1	7	20

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY,
CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.

KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND
ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

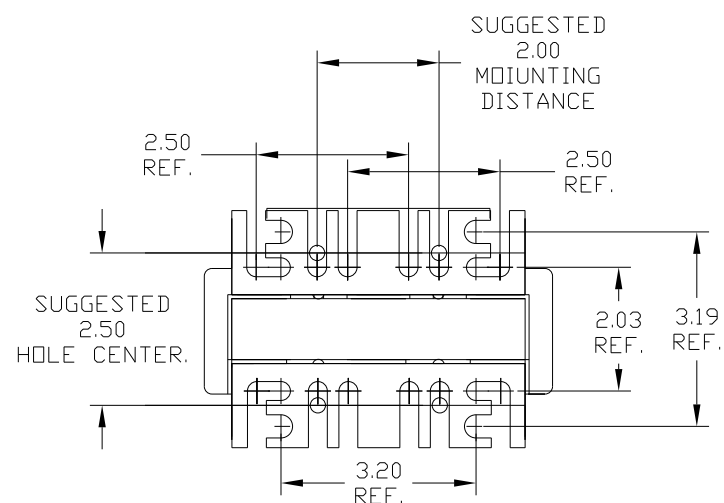

Block Wire Range: #18 to #4 AWG Solid or Stranded, Copper
Tightening Torque: 20 LB-IN

					TOLERANCES (EXCEPT AS NOTED)		 7878 N. 86th STREET MILWAUKEE, WI 53224	
						DECIMAL		
						.XX ± .03		
						.XXX± .01		
						FRACTIONAL ± 1/32		
B	ADD MARKING NOTE	11/15/06	DSW			DRN. BY DSW	DATE 7/27/01	DWG. NO. B KDRB1PDG
△	2235 MOUNTING CHANGE	09/15/03	DSW			SCALE	APRVD.	SHT 1 of 1
NO	REVISION	DATE	BY			ANGULAR ± 1/2°		