

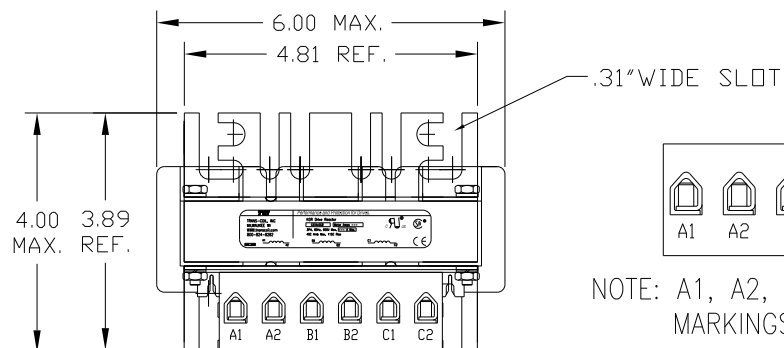
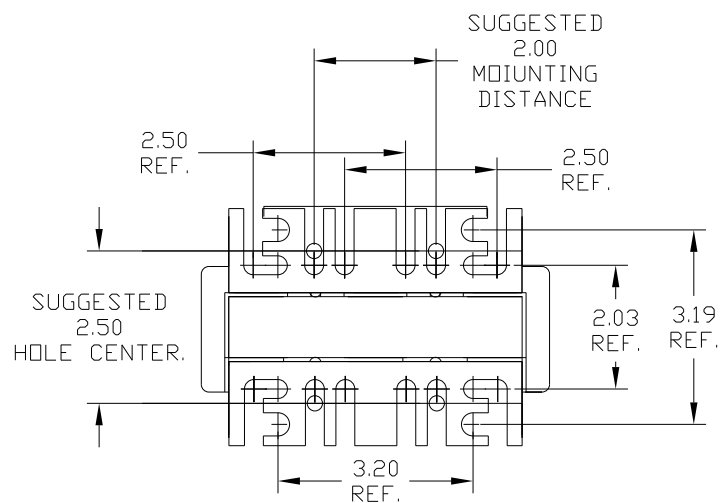
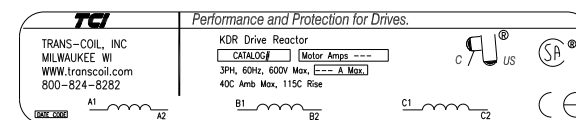




NOTE: A1, A2, B1, B2, C1, C2,
MARKINGS ON TERMINAL BLOCK
FOR REFERENCE ONLY.

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRB2L	480	15	21	65	8	20

Block Wire Range: #18 to #4 AWG Solid or Stranded, Copper
Tightening Torque: 20 LB-IN

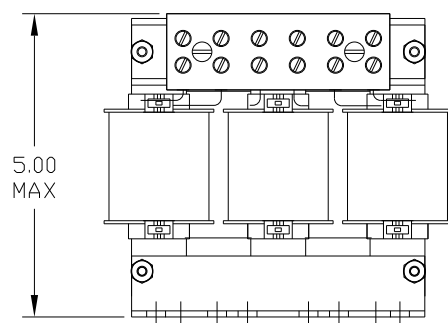

					TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224
					DECIMAL	
					.XX ± .03	
					.XXX± .01	
					FRACTIONAL ± 1/32	KDR DRIVE REACTOR 480V LOW Z, FRAME B
B	ADD MARKING NOTE	11/16/06	DSW			
△	2235 MOUNTING CHANGE	09/15/03	DSW		ANGULAR ± 1/2°	DRN. BY DSW DATE 07/27/01 DWG. NO. B KDRB2LDG
NO	REVISION	DATE	BY			SCALE APRVD. SHT 1 of 1