
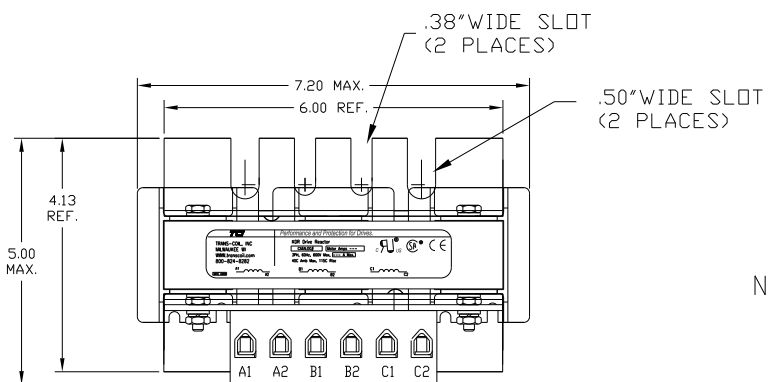



NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON TERMINAL BLOCK FOR REFERENCE ONLY.

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRC1L	480	40	52	114	15	20

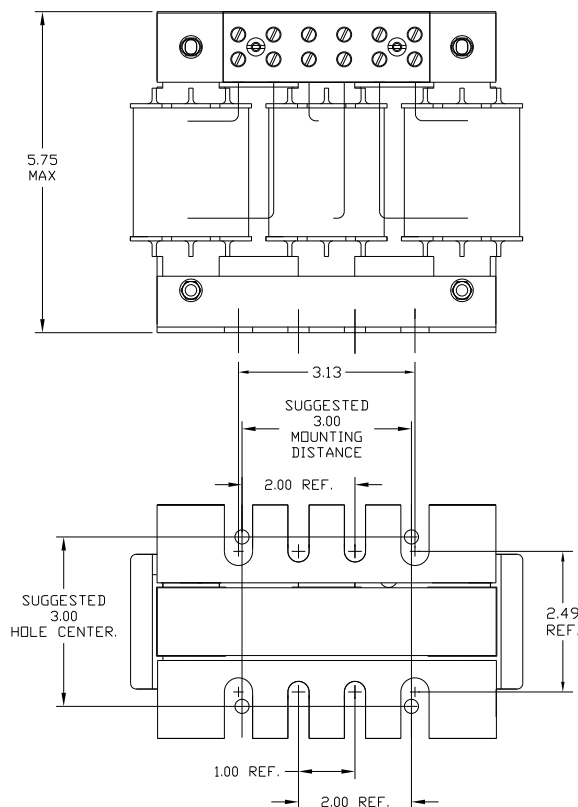

Block Wire Range: #18 to #4 AWG Solid or Stranded, Copper
Tightening Torque: 20 LB-IN

					TOLERANCES (EXCEPT AS NOTED)		 7878 N. 86th STREET MILWAUKEE, WI 53224	
						DECIMAL		
						.XX ± .03		
						.XXX± .01		
						FRACTIONAL ± 1/32		
B	ADD MARKING NOTE	11/16/06	DSW				DRN. BY DSW	DATE 07/30/01
A	2235 MOUNTING CHANGE	09/15/03	DSW					DWG. NO. KDRC1LDG
NO	REVISION	DATE	BY			ANGULAR ± 1/2°	SCALE	APRVD.
								SHT. 1 of 1