

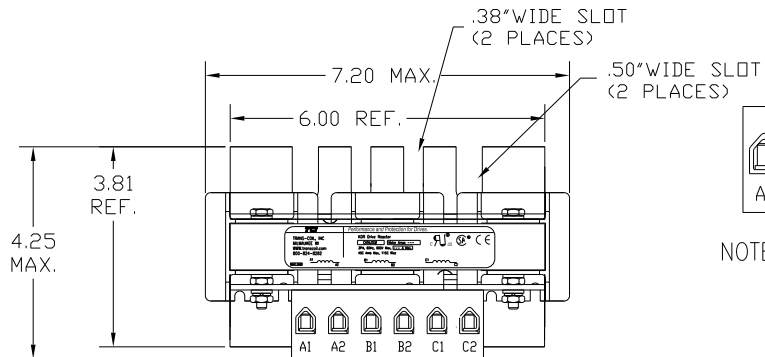



NOTE: A1, A2, B1, B2, C1, C2,
MARKINGS ON TERMINAL BLOCK
FOR REFERENCE ONLY.


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRD24L	208/240	15	46.2	85	12	20



NOTE: NEC MOTOR CURRENT SHOWN
ARE BASED ON HORSEPOWER AT 208 VOLTS.

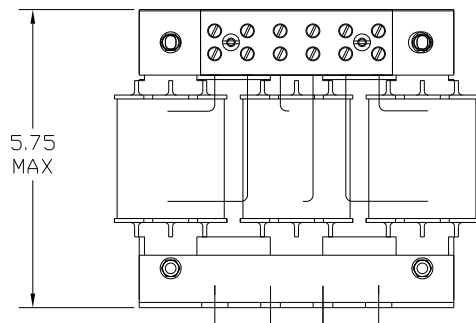

Block Wire Range: #18 to #4 AWG Solid or Stranded, Copper
Tightening Torque: 20 LB-IN

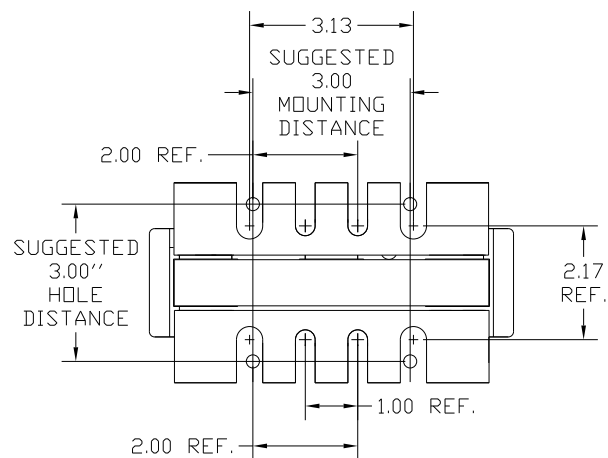

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224		
				DECIMAL			
				.XX ± .03	KDR DRIVE REACTOR 240V LOW Z, FRAME D		
				.XXX± .01			
B	ADD MARKING NOTE	11/20/06	DSW	FRACTIONAL ± 1/32	DRN. BY DSW	DATE 02/21/03	DWG. NO. B
A	2235 MOUNTING CHANGE	09/15/03	DSW	ANGULAR ± 1/2°	SCALE	APRVD	KDRD24LDG SHT 1 of 1
NO	REVISION	DATE	BY				