

**INLINE HMI, TYPE 4**



**INDUSTRY STANDARDS**

UL 508A Listed; Type 4, 12; File No. E61997  
 cUL Listed per CSA C22.2 No. 94; Type 4, 12; File No. E61997


NEMA/EEMAC Type 4, 12  
 CSA File Number 42186: Type 4, 12  
 IEC 60529, IP66

**APPLICATION**

Practical functionality is the signature feature of all INLINE HMI enclosures. With multiple options that allow for many different configurations, these enclosures are highly adaptable and useful in applications where a protective housing is required for small HMI devices.

**FINISH**

RAL 7035 textured light-gray polyester powder paint inside and out over pretreated surfaces. Optional panels are white.

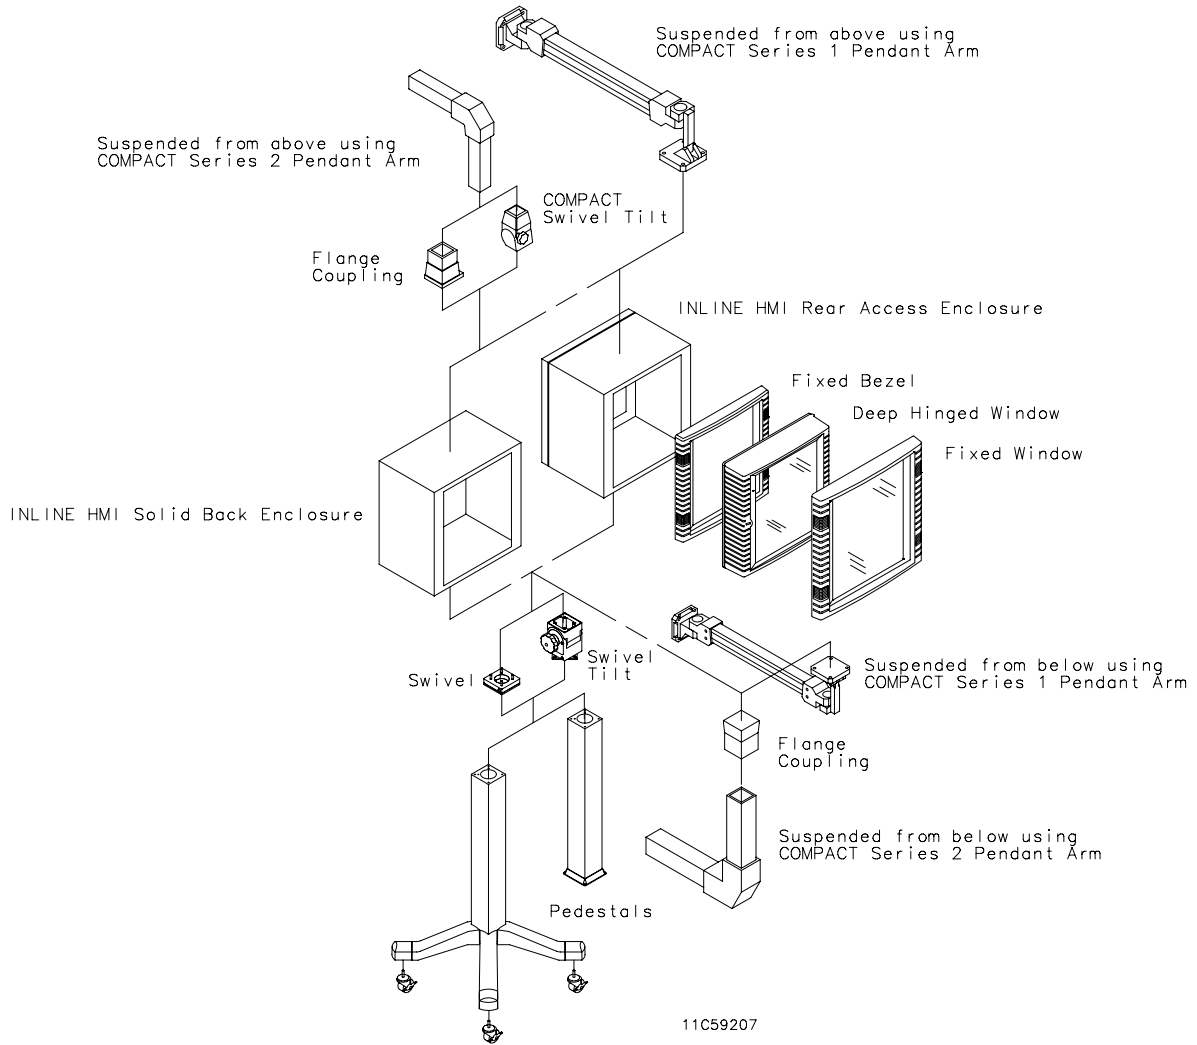

**WING KNOB LATCH**




Wing Knob Latch can replace the standard slotted, quarter-turn latch on all hinged-cover and window-cover enclosures. Latch is black die-cast zinc. Includes two keys and installation instructions.

**BULLETIN: A54Y**

Catalog Number	Product Weight
LLKWK	0.2 lb.

Reduces UL Type rating from 4 or 4X to 12.

**MOUNTING BRACKET KIT, PLATED AND 316**




Kit is field-installable on all solid-back-body enclosures. Hardware included. Four brackets per kit.

**BULLETIN: A54SY, A54Y**

Catalog Number	Description
LMFK	Plated steel mounting-bracket kit
LMFKSS	Type 316L stainless steel mounting-bracket kit

Use of LMFKSS recommended to maintain Type 4X rating.

**GROUNDING KIT**



Grounding Kit provides means to attach a grounding conductor to the enclosure. Kit includes two insulated copper wires with a ring terminal at each end, all installation hardware and instructions.

**BULLETIN: A54Y**

Catalog Number	Product Weight
LLGK	0.2 lb.